

Fundamental constants

| Quantity | Symbol | Approximate value |
|--|--------------|---|
| Acceleration of free fall (Earth's surface) | g | 9.81 ms^{-2} |
| Gravitational constant | G | $6.67 \times 10^{-11}\text{ N m}^2\text{ kg}^{-2}$ |
| Avogadro's constant | N_A | $6.02 \times 10^{23}\text{ mol}^{-1}$ |
| Gas constant | R | $8.31\text{ J K}^{-1}\text{ mol}^{-1}$ |
| Boltzmann's constant | k | $1.38 \times 10^{-23}\text{ J K}^{-1}$ |
| Stefan–Boltzmann constant | σ | $5.67 \times 10^{-8}\text{ W m}^{-2}\text{ K}^{-4}$ |
| Coulomb constant | k | $8.99 \times 10^9\text{ N m}^2\text{ C}^{-2}$ |
| Permittivity of free space | ϵ_0 | $8.85 \times 10^{-12}\text{ C}^2\text{ N}^{-1}\text{ m}^{-2}$ |
| Permeability of free space | μ_0 | $4\pi \times 10^{-7}\text{ T m A}^{-1}$ |
| Speed of light in vacuum | c | $3.00 \times 10^8\text{ ms}^{-1}$ |
| Planck's constant | h | $6.63 \times 10^{-34}\text{ Js}$ |
| Elementary charge | e | $1.60 \times 10^{-19}\text{ C}$ |
| Electron rest mass | m_e | $9.110 \times 10^{-31}\text{ kg} = 0.000549\text{ u} = 0.511\text{ MeV c}^{-2}$ |
| Proton rest mass | m_p | $1.673 \times 10^{-27}\text{ kg} = 1.007276\text{ u} = 938\text{ MeV c}^{-2}$ |
| Neutron rest mass | m_n | $1.675 \times 10^{-27}\text{ kg} = 1.008665\text{ u} = 940\text{ MeV c}^{-2}$ |
| Unified atomic mass unit | u | $1.661 \times 10^{-27}\text{ kg} = 931.5\text{ MeV c}^{-2}$ |

Metric (SI) multipliers

| Prefix | Abbreviation | Value |
|--------|--------------|------------|
| tera | T | 10^{12} |
| giga | G | 10^9 |
| mega | M | 10^6 |
| kilo | k | 10^3 |
| hecto | h | 10^2 |
| deca | da | 10^1 |
| deci | d | 10^{-1} |
| centi | c | 10^{-2} |
| milli | m | 10^{-3} |
| micro | μ | 10^{-6} |
| nano | n | 10^{-9} |
| pico | p | 10^{-12} |
| femto | f | 10^{-15} |

Unit conversions

1 light year (ly) = 9.46×10^{15} m

1 parsec (pc) = 3.26 ly

1 astronomical unit (AU) = 1.50×10^{11} m


1 radian (rad) = $\frac{180^\circ}{\pi}$

1 kilowatt-hour (kWh) = 3.60×10^6 J

1 atm = 1.01×10^5 N m⁻² = 101 kPa = 760 mm Hg

Electrical circuit symbols

cell



battery



lamp




ac supply




switch




ammeter




voltmeter




variable resistor




resistor




potentiometer




light-dependent resistor (LDR)



thermistor




transformer



heating element




operational amplifier (op-amp)



Equations – Core and AHL

Note: All equations relate to the magnitude of the quantities only. Vector notation has not been used.
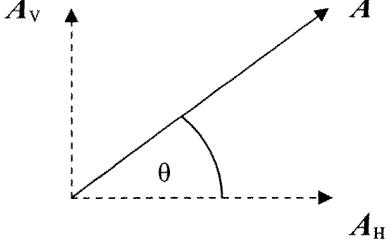
| Core | AHL |
|---|-----|
| <p>Topic I: Physics and physical measurement</p> <p>If $y = a \pm b$ then $\Delta y = \Delta a + \Delta b$</p> <p>If $y = \frac{ab}{c}$ then $\frac{\Delta y}{y} = \frac{\Delta a}{a} + \frac{\Delta b}{b} + \frac{\Delta c}{c}$</p>  $A_H = A \cos \theta$ $A_V = A \sin \theta$ | |

| Core | AHL |
|---|---|
| <p>Topic 2: Mechanics</p> $s = \frac{u + v}{2} t$ $s = ut + \frac{1}{2} at^2$ $v^2 = u^2 + 2as$ $F = ma$ $p = mv$ $F = \frac{\Delta p}{\Delta t}$ $\text{Impulse} = F\Delta t = m\Delta v$ $W = Fs \cos \theta$ $E_k = \frac{1}{2} mv^2$ $E_k = \frac{p^2}{2m}$ $\Delta E_p = mg\Delta h$ $\text{power} = Fv$ $a = \frac{v^2}{r} = \frac{4\pi^2 r}{T^2}$ | |
| <p>Topic 3: Thermal physics</p> $P = \frac{F}{A}$ $Q = mc\Delta T$ $Q = mL$ | <p>Topic 10: Thermal physics</p> $PV = nRT$ $W = P\Delta V$ $Q = \Delta U + W$ |

| Core | AHL |
|---|--|
| <p>Topic 4: Oscillations and waves</p> $\omega = \frac{2\pi}{T}$ $x = x_0 \sin \omega t; \quad x = x_0 \cos \omega t$ $v = v_0 \cos \omega t; \quad v = -v_0 \sin \omega t$ $v = \pm \omega \sqrt{(x_0^2 - x^2)}$ $E_K = \frac{1}{2} m \omega^2 (x_0^2 - x^2)$ $E_{K(\text{max})} = \frac{1}{2} m \omega^2 x_0^2$ $E_T = \frac{1}{2} m \omega^2 x_0^2$ $v = f \lambda$ $\frac{n_1}{n_2} = \frac{\sin \theta_2}{\sin \theta_1} = \frac{v_2}{v_1}$ <p>path difference = $n\lambda$</p> <p>path difference = $(n + \frac{1}{2})\lambda$</p> | <p>Topic 11: Wave phenomena</p> $f' = f \left(\frac{v}{v \pm u_s} \right) \quad \text{moving source}$ $f' = f \left(\frac{v \pm u_o}{v} \right) \quad \text{moving observer}$ $\Delta f = \frac{v}{c} f$ $\theta = \frac{\lambda}{b}$ $\theta = 1.22 \frac{\lambda}{b}$ $I = I_0 \cos^2 \theta$ $n = \tan \phi$ |

| Core | AHL | | | | | | | | | | |
|--|---|-----------------------------|-------------------|-------------------|---|-----------------------------------|-----------------------------------|---------------------|---|----------------------------------|----------------------------------|
| Topic 5: Electric currents $Ve = \frac{1}{2}mv^2$ $I = \frac{\Delta q}{\Delta t}$ $R = \frac{V}{I}$ $R = \frac{\rho L}{A}$ $P = VI = I^2 R = \frac{V^2}{R}$ $\mathcal{E} = I(R + r)$ $R = R_1 + R_2 + \dots$ $\frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2} + \dots$ | Topic 12: Electromagnetic induction $\Phi = BA \cos \theta$ $\mathcal{E} = Bvl$ $\mathcal{E} = -N \frac{\Delta \Phi}{\Delta t}$ $\frac{I_s}{I_p} = \frac{V_p}{V_s} = \frac{N_p}{N_s}$ $I_{\text{rms}} = \frac{I_0}{\sqrt{2}}$ $V_{\text{rms}} = \frac{V_0}{\sqrt{2}}$ $R = \frac{V_0}{I_0} = \frac{V_{\text{rms}}}{I_{\text{rms}}}$ $P_{\text{max}} = I_0 V_0$ $P_{\text{av}} = \frac{1}{2} I_0 V_0$ | | | | | | | | | | |
| Topic 6: Fields and forces <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">$F = G \frac{m_1 m_2}{r^2}$</td> <td style="padding: 5px;">$F = k \frac{q_1 q_2}{r^2}$</td> </tr> <tr> <td style="padding: 5px;">$g = \frac{F}{m}$</td> <td style="padding: 5px;">$E = \frac{F}{q}$</td> </tr> </table> $F = \frac{q_1 q_2}{4\pi\epsilon_0 r^2}$ $F = qvB \sin \theta$ $F = BIL \sin \theta$ | $F = G \frac{m_1 m_2}{r^2}$ | $F = k \frac{q_1 q_2}{r^2}$ | $g = \frac{F}{m}$ | $E = \frac{F}{q}$ | Topic 9: Motion in fields <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">$\Delta V = \frac{\Delta E_p}{m}$</td> <td style="padding: 5px;">$\Delta V = \frac{\Delta E_p}{q}$</td> </tr> <tr> <td style="padding: 5px;">$V = -\frac{Gm}{r}$</td> <td style="padding: 5px;">$V = \frac{kq}{r} = \frac{q}{4\pi\epsilon_0 r}$</td> </tr> <tr> <td style="padding: 5px;">$g = -\frac{\Delta V}{\Delta r}$</td> <td style="padding: 5px;">$E = -\frac{\Delta V}{\Delta x}$</td> </tr> </table> | $\Delta V = \frac{\Delta E_p}{m}$ | $\Delta V = \frac{\Delta E_p}{q}$ | $V = -\frac{Gm}{r}$ | $V = \frac{kq}{r} = \frac{q}{4\pi\epsilon_0 r}$ | $g = -\frac{\Delta V}{\Delta r}$ | $E = -\frac{\Delta V}{\Delta x}$ |
| $F = G \frac{m_1 m_2}{r^2}$ | $F = k \frac{q_1 q_2}{r^2}$ | | | | | | | | | | |
| $g = \frac{F}{m}$ | $E = \frac{F}{q}$ | | | | | | | | | | |
| $\Delta V = \frac{\Delta E_p}{m}$ | $\Delta V = \frac{\Delta E_p}{q}$ | | | | | | | | | | |
| $V = -\frac{Gm}{r}$ | $V = \frac{kq}{r} = \frac{q}{4\pi\epsilon_0 r}$ | | | | | | | | | | |
| $g = -\frac{\Delta V}{\Delta r}$ | $E = -\frac{\Delta V}{\Delta x}$ | | | | | | | | | | |

| Core | AHL |
|--|--|
| <p>Topic 7: Atomic and nuclear physics</p> $E = mc^2$ | <p>Topic 13: Quantum physics and nuclear physics</p> $E = hf$ $hf = \phi + E_{\max}$ $hf = hf_0 + eV$ $p = \frac{h}{\lambda}$ $E_K = \frac{n^2 h^2}{8m_e L^2}$ $\Delta x \Delta p \geq \frac{\hbar}{4\pi}$ $\Delta E \Delta t \geq \frac{\hbar}{4\pi}$ $N = N_0 e^{-\lambda t}$ $A = -\frac{\Delta N}{\Delta t}$ $A = \lambda N = \lambda N_0 e^{-\lambda t}$ $T_{\frac{1}{2}} = \frac{\ln 2}{\lambda}$ |

| Core | AHL |
|---|-----|
| <p>Topic 8: Energy, power and climate change</p> <p>power = $\frac{1}{2} A \rho v^3$</p> <p>power per unit length = $\frac{1}{2} A^2 \rho g v$</p> <p>$I = \frac{\text{power}}{A}$</p> <p>albedo = $\frac{\text{total scattered power}}{\text{total incident power}}$</p> <p>$C_s = \frac{Q}{A\Delta T}$</p> <p>power = $\sigma A T^4$</p> <p>power = $e \sigma A T^4$</p> <p>$\Delta T = \frac{(I_{\text{in}} - I_{\text{out}}) \Delta t}{C_s}$</p> | |

Option A: Sight and wave phenomena

$$f' = f \left(\frac{v}{v \pm u_s} \right) \quad \text{moving source} \quad \theta = \frac{\lambda}{b}$$

$$f' = f \left(\frac{v \pm u_o}{v} \right) \quad \text{moving observer} \quad \theta = 1.22 \frac{\lambda}{b}$$

$$\Delta f = \frac{v}{c} f \quad I = I_0 \cos^2 \theta \quad n = \tan \phi$$

Option B: Quantum physics and nuclear physics

$$E = hf \quad \Delta E \Delta t \geq \frac{h}{4\pi}$$

$$hf = \phi + E_{\max}$$

$$hf = hf_0 + eV$$

$$P = \frac{h}{\lambda} \quad A = -\frac{\Delta N}{\Delta t}$$

$$E_K = \frac{n^2 h^2}{8m_e L^2} \quad A = \lambda N = \lambda N_0 e^{-\lambda t}$$

$$\Delta x \Delta p \geq \frac{h}{4\pi} \quad T_{\frac{1}{2}} = \frac{\ln 2}{\lambda}$$

Option C: Digital technology

$$G = -\frac{R_F}{R}$$

$$G = 1 + \frac{R_F}{R}$$

| Core (SL and HL) | Extension (HL only) |
|---|--|
| <p>Option G: Electromagnetic waves</p> $\frac{1}{f} = \frac{1}{v} + \frac{1}{u}$ $P = \frac{1}{f}$ $m = \frac{h_i}{h_o} = -\frac{v}{u} \quad M = \frac{\theta_i}{\theta_o}$ $M = \frac{f_o}{f_e}$ $m = \frac{D}{f} + 1 \quad m = \frac{D}{f}$ $s = \frac{\lambda D}{d}$ $\sin \theta = \frac{n\lambda}{d}$ $\frac{x}{D} = \frac{n\lambda}{d}$ $\frac{x}{D} = (n + \frac{1}{2}) \frac{\lambda}{d}$ $d \sin \theta = n\lambda$ | $\lambda_{\min} = \frac{hc}{eV}$ $2d \sin \theta = n\lambda$ $2nt = m\lambda$ $2nt = (m + \frac{1}{2})\lambda$ $2nt \cos \phi = m\lambda$ $2nt \cos \phi = (m + \frac{1}{2})\lambda$ |